Wireless Universal Serial Bus

Christopher Hanudel

Outline

• Wired Universal Serial Bus (USB)

- Overview of Wireless USB (wUSB)
 - History/Vision
 - Features
- How wUSB Works
 - Design
 - Security
- Issues/Limitations
- Current Implementations
- Future/Conclusion

Wired USB

Overview

- Plug/Play standard for peripheral devices
- Standardized by the USB Implementers Forum
- Technical Details
 - Host/Slave Connection
 - PC (host) manages all transfers; peripherals (slave) just responds
 - Supports 127 slaves per host
 - Physical Connection
 - Four wire connection
 - Two wires for power (+5 and GND)
 - Two wires (twisted pair) for synchronous serial data
 - Computer supplies power (up to 500 mA)

Wired USB

• Technical Details (Cont.)

- Data Rates
 - Low Speed: 1.5 Mbps (Keyboards, mice, etc.)
 - Full Speed: 12 Mbps (USB1.1 max speed)
 - Hi-Speed: 480 Mbps (USB2.0 max speed)

Reasons For Wireless USB

• Wired Issues

- Wires are restrictive
- Multiple wires can be a hassle
- Wires slower than wireless solutions

Current wireless solutions inadequate

- Bluetooth
 - Bandwidth of 3 Mbps not enough for higher demand applications (Video, HDTV, Monitor)
- WiFi
 - Expensive
 - Too much power usage for mobile devices

Data Rate Comparisons

Home Activity	Mbps Bandwidth Requirements *
Multiple, simultaneous VoIP calls	0.1 - 0.2
Phone Text browsing (WAP)	0.1 - 0.5
Streaming whole-home audio	0.2 - 0.5
Static Web surfing on PC	0.2 - 0.5
Streaming video onto phone	0.2 - 3
Streaming SD Video onto TV	2 3
Streaming Multiple HD Videos on TV's	6 20
Multiple PC-Based LAN applications **	10 20
Theoretical Maximum	500
* Based on existing applications	Bluetooth (3 Mbps) Wireless LAN Wireless USB (320 Mbps) (410 Mbps) HSDPA (1 Mbps) Source: Texas Instruments - Internal Analysis

** Such as file transfers, storage, background IT applications, etc.

Wireless USB Overview

Overview

- Has evolved as companies figured out standards
- Based on Ultra-Wideband (UWB) RF technology
- UWB is a technology for transmitting data over a large bandwidth (>500 MHz)

• History of Ultra-Wideband (UWB)

- Late 1800s: Started with Spark Gap radio for transmitting Morse Code
- 1924: Spark Gap forbidden due to disruptive nature to narrowband carrier radios
- 1960s 1999s: Better test equipment promoted research of UWB for radar and communications

Wireless USB Overview

• History of Ultra-Wideband (cont.)

- April 2002: FCC issued UWB Regulations
 - Permitted marketing and operation of new products
 - Limited power and freq range
- 2002: Two standards emerge
 - Orthogonal Frequency Division Multiplexing (OFDM) UWB
 - WiMedia Alliance & Intel
 - Direct Sequence (DS) UWB
 - UWB Forum & Freescale
- 2006: DS-UWB loses support & OFDM-UWB wins
 - Freescale left UWB Forum; became quiet
 - Many companies dropped Freescale chips
 - Freescale trying proprietary "Cable-Free USB"
- 2007: Products begin to hit the market

Wireless USB Overview

- Goals of Intel OFDM-UWB Wireless USB Standard
 - Wireless version of USB; same features, speeds
 - Interoperable across three major platforms
 - Consumer Electronic devices (digital video/audio)
 - Mobile devices (cellular phones, PDA)
 - Personal Computing (laptop, PC, printer, peripherals)
 - High bandwidth to support demanding data transfer (High Definition, Monitors)
 - Mobile friendly
 - Low power usage
 - Inexpensive costs
 - Small physical implementation
 - High level of security
 - Next gen Wireless Personal Area Network (WPAN)

Wireless USB Vision


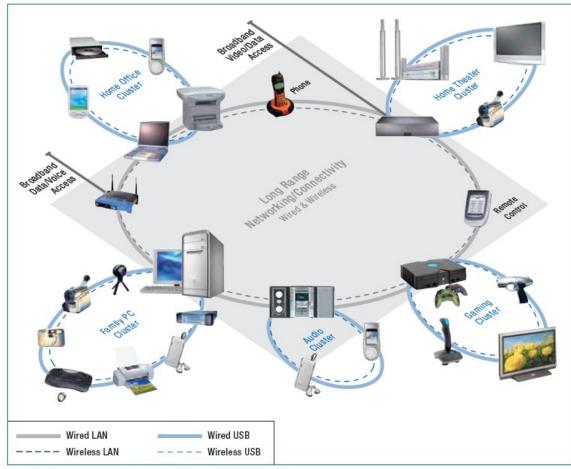


Figure 1. Home usage scenarios that could be "unwired" with Wireless USB.

Wireless USB Vision

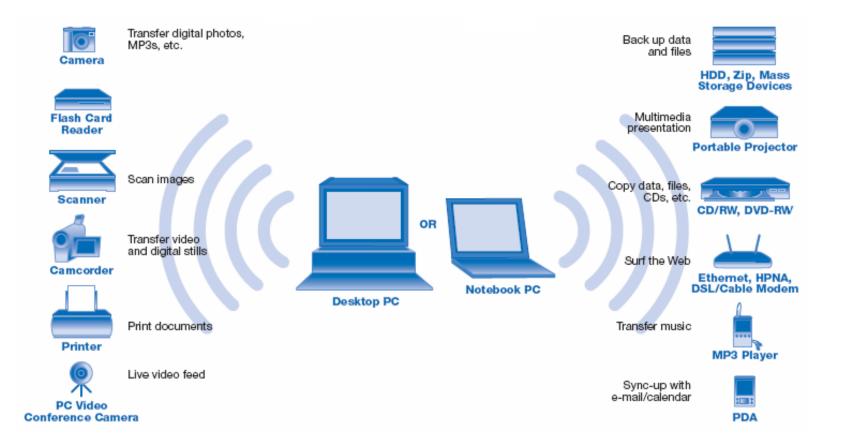

Wireless USB Physical Design


• Features of UWB

- Speed/Range
 - Scaleable speeds up over 1 Gbps
 - Currently 480 Mbps at 3 m; 110 Mbps at 10 m
- Frequency: 3.1 GHz to 10.6 GHz
 - Divided into 14 bands; 5 groups
 - Each band is 528 MHz wide
 - OFDM symbols are interleaved across all bands
 - Provides protection against multi-path / interference

Wireless USB Physical Design

• Features of UWB (cont.)


- Frequency: 3.1 GHz to 10.6 GHz (cont.)
 - Band Groups 1 & 2: Longer range apps
 - Bands Groups 3 & 4: Shorter range apps
 - Bands can be turned off to accommodate for conflicts or for regulations

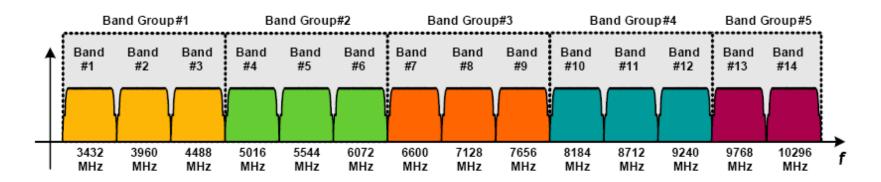

Wireless USB Physical Design

• Features of UWB (cont.)

- Power
 - Power is limited due to usage of wide spectrum
 - Low power for mobile devices and minimum interference
 - Max output to -41.3 dBm/MHz

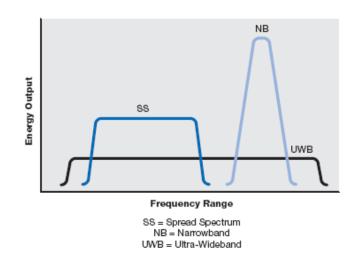

Wireless USB Security Design

Overview

- Strongly stressed in wUSB specification and outlined in its own requirements document
- Security needed due to crowded environments
- Two major components: Association and Encryption
- Association
 - Overview
 - Device must first associate with the host in a one-time event
 - Accomplished via wired verification or numeric association

Wireless USB Security Design

• Association (cont.)

- Wired Verification
 - Cable is attached between devices
 - Exchanges a unique 384-bit identifier known as the "connection context"
- Numeric Association
 - Devices associate wirelessly
 - User must enter a hex code manually

Wireless USB Security Design

Encryption

- Data encrypted with the AES 128 algorithm
- During each session devices derive a session key based on "connection context"
- Wireless data is encrypted using session key
- Does not encrypt PHY and MAC headers


Wireless USB Connection Design

Host/Slave Connection

- Similar to wired USB (127 devices; host is PC)
- Each host forms a cluster
- Clusters can coexist with minimum interference

Power Management

- Sleep/Listen/Wake used to conserve power
- Tx/Rx power management

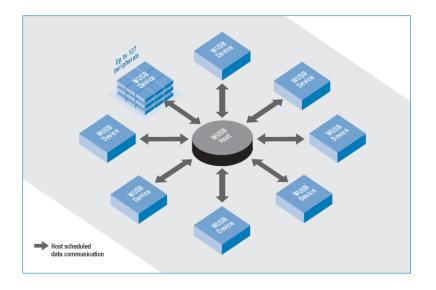


Wireless USB Issues/Problems

Interference Issues

- Potential conflict to devices on same frequencies
- Detect and Avoid"
 - Wisair's solution to detect other frequencies
 - Switches to frequencies not being used
- Conflict issues are more of a concern for wireless USB devices being overpowered
- Competing Standards
 - Cable-Free USB (Freescale)
 - USB-Implementers Forum (Intel, HP, Microsoft)

Product Comparison

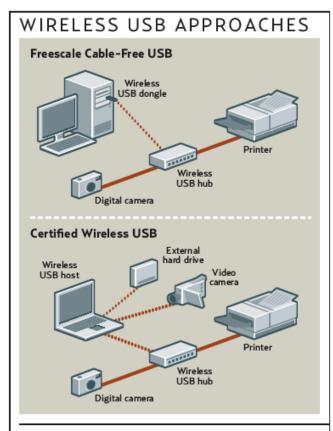

Freescale's Cable-Free USB lets legacy wired USB devices go wireless **using a hub-and-dongle combo** implemented in a point-to-point model. In contrast, Certified Wireless USB uses a hub-and-spoke model where a wireless USB hub and devices with integrated wireless USB can communicate with a single host.

Wireless USB Implementations

Belkin Cable Free Hub

- Released Dec, 2006
- Dongle attaches to PC
- Retail price of \$199.00
- Speeds up to 480 Mbps



Wireless USB Implementations

• GeFen HMDI Extender

- Coming soon...
- Based on WiMedia Alliance specification
- Retail price of \$699.00
- Range of 20 meters; data rates up to 480 Mbps
- Frequency band: 3.1 4.8 GHz
- Resolution support : 480i, 480p, 720p, and 1080i



Wireless USB Implementations

• Seagate Wireless USB Hard Drive

- Coming soon...
- 2.5 inches wide
- Speeds up to 480 Mbps



Future of Wireless USB

• Early 2007

- Initial devices being produced
- Late 2007
 - Expect wUSB being built into laptops, PCs, multimedia devices
- 2008
 - Visiongain research firm predicts increase of wUSB by 400 percent
- 2009-2010
 - Wide scale interoperability?

Concluding Thoughts

- Appears well designed; good support
- Slow start of products
 - Will it really catch on?
 - More products need to be developed
- Promises a lot; will it deliver?
- Security is very important



Questions?



